




N2X(F)K2Y

High Voltage Cables

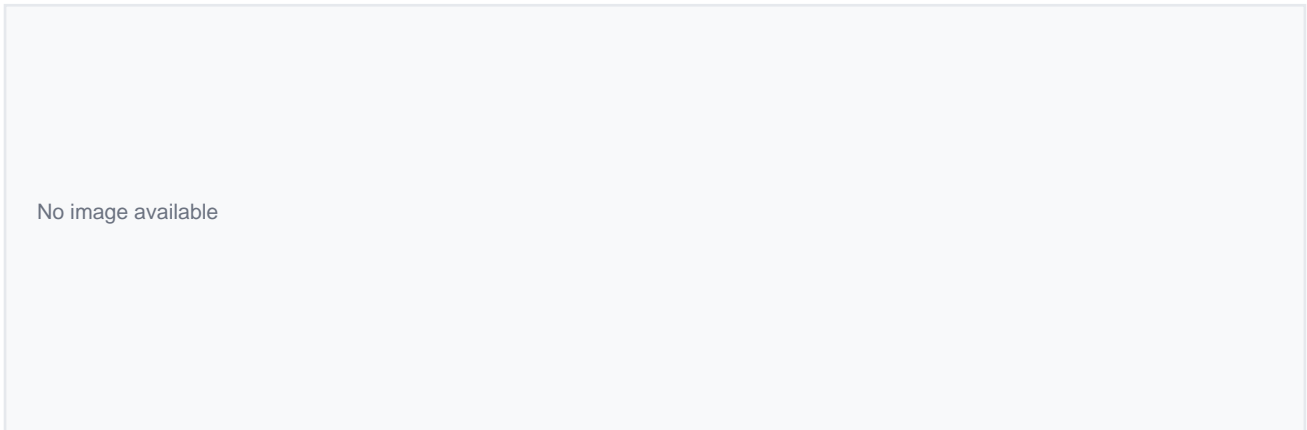

DESCRIPTION

The N2X(F)K2Y high-voltage cable series, designed for 64/110kV applications, utilizes copper conductors and XLPE insulation to meet the rigorous demands of industrial power distribution and transmission. These cables are engineered for high ampacity and fault current withstand in diverse

TECHNICAL DATA	
Standard IEC 60502-2	Voltage rating 64/110 kV
Max operating temperature +90 °C	Bending radius (min.) 1.3–2.4

CROSS-SECTION DATA

Options: 16 · Cores: 1 · mm²: 150–3000

- 1x
- 150
 - 185
 - 240
 - 300
 - 400
 - 500
 - 630
 - 800
 - 1000
 - 1200
 - 1400
 - 1600
 - 1800
 - 2000
 - 2500
 - 3000